

PRODUCT CATALOGUE

GATE, DOOR, WINDOW MAGNETIC CONTACTS


AST GATES
DOORS
WINDOWS



AAT HOLDING S.A.

RECESSED MAGNETIC CONTACTS

THE DESIGN OF THE RECESSED CONTACTS ON THE SURFACE BETWEEN THE REED SWITCH AND MAGNET IS FLAT, WHICH ALLOWS THE DEVICE TO BE POSITIONED IN NARROW SPACES. WHILE INSTALLING THE CONTACT, IT IS NECESSARY TO MAKE HOLES IN THE WINDOW/DOOR FRAME AND WINDOW SASH OR DOOR LEAF. THIS INSTALLATION METHOD MAKES THE SECURITY TO BE INVISIBLE WHEN WINDOWS OR DOORS ARE CLOSED.




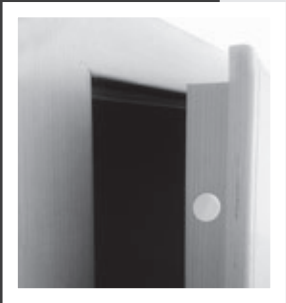


Small and flat contact surface allows easy opening/closing of windows and doors.



Magnetic contact is not visible when the window or door are closed.

RECESSED MAGNETIC CONTACTS

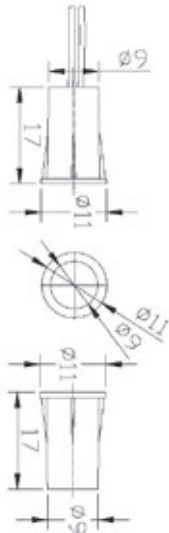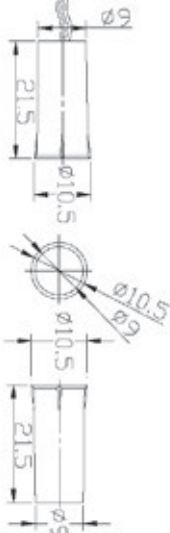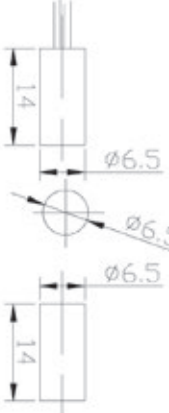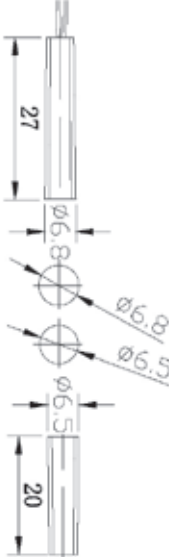				
	AST-MKT2004W/B	AST-MKT2005W/B	AST-MKT2006W/B	AST-MKT2007W/B
Output	NC	NC	NC	NC
Contact specification	0.5 A/100 VDC/10 W/200 mΩ	0.5 A/100 VDC/10 W/200 mΩ	0.5 A/100 VDC/10 W/200 mΩ	0.5 A/100 VDC/10 W/200 mΩ
Connection	cable	cable	cable	cable
Gap distance	15 mm - 25 mm	15 mm - 25 mm	15 mm - 25 mm	20 mm - 25 mm
Applications	windows, wooden doors	windows, wooden doors	windows, wooden doors	windows, wooden doors
Colour	white/brown	white/brown	white/brown	white/brown
Dimensions of contact part (D x Ø)	17 mm x 9 mm	21.5 mm x 9 mm	14 mm x 6.5 mm	27 mm x 6.8 mm
Dimensions of magnet part (L x Ø)	17 mm x 9 mm	21.5 mm x 9 mm	14 mm x 6.5 mm	20 mm x 6.5 mm
				



AST-MKT2008W/B

NC

0.5 A/100 VDC/10 W/200 mΩ

cable

15 mm - 25 mm

windows, wooden doors

white/brown

32.5 mm x 8.8 mm

32.5 mm x 8.8 mm



AST-MKT2009W/B

NC

0.5 A/100 VDC/10 W/200 mΩ

cable




30 mm - 40 mm

wooden and metal doors

white/brown

25 mm x 15 mm

25 mm x 15 mm

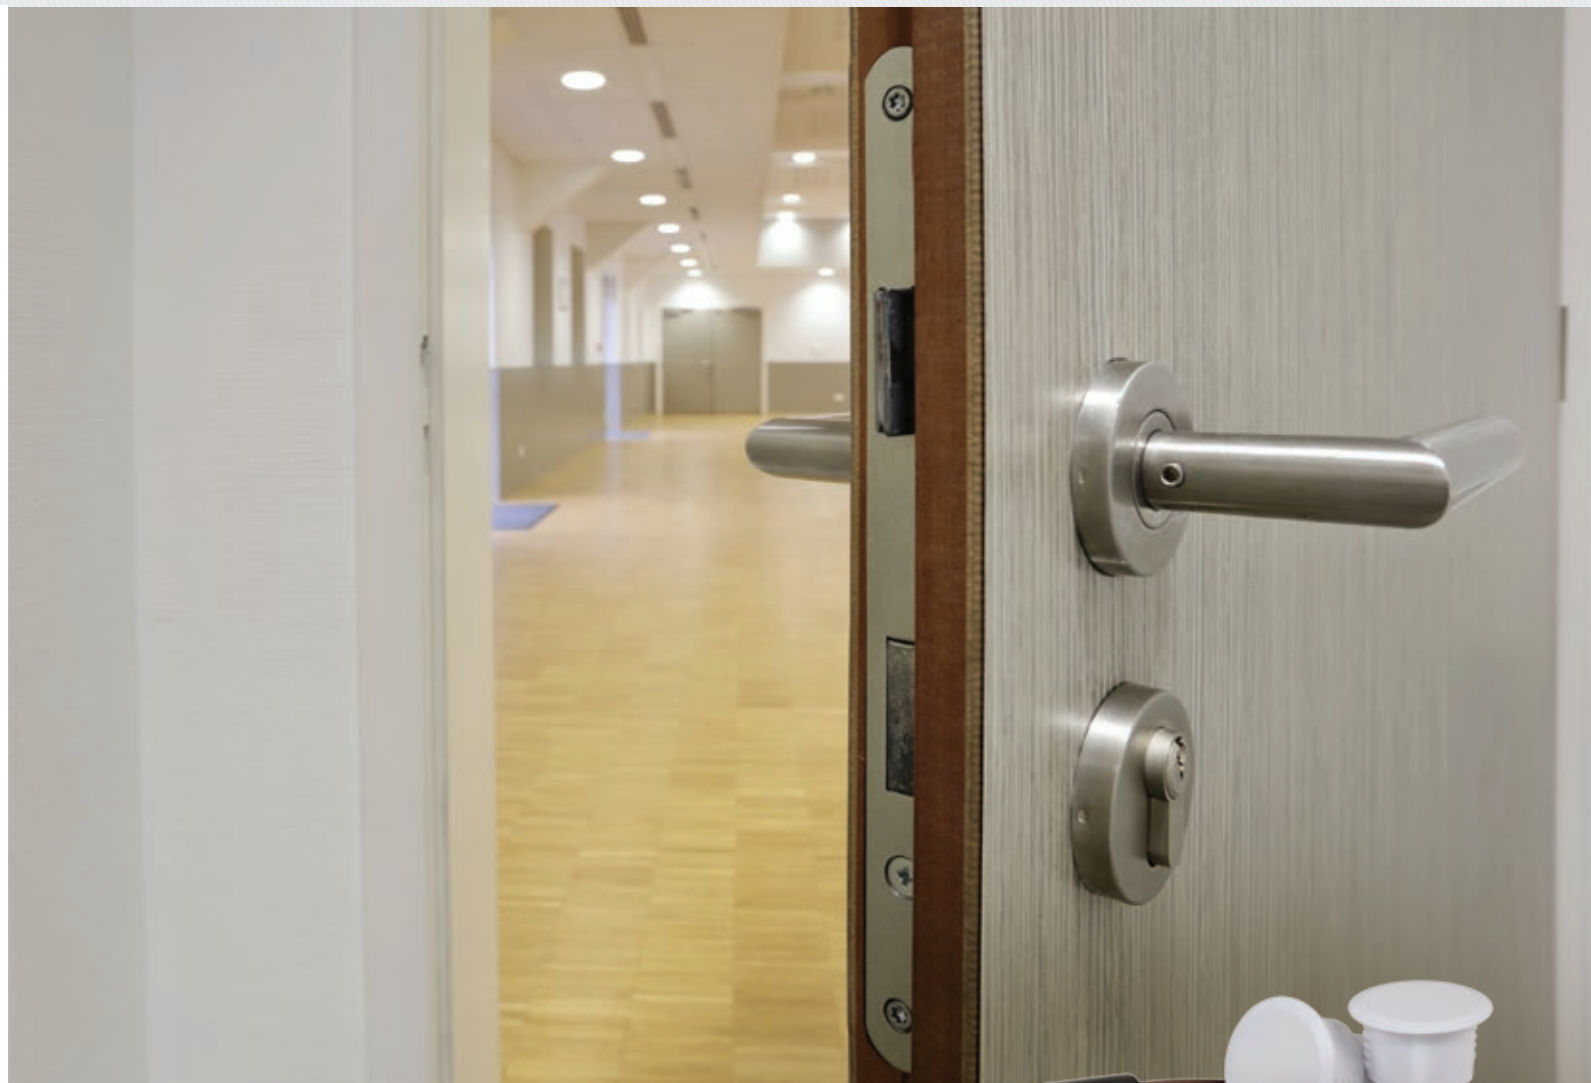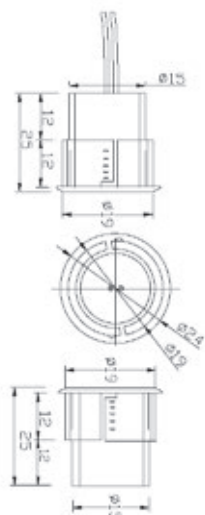

SURFACE MOUNT MAGNETIC CONTACTS

SURFACE MOUNT MAGNETIC CONTACTS ARE IDEAL FOR RESIDENTIAL AND COMMERCIAL APPLICATIONS. DURING THE INSTALLATION, NO ADDITIONAL HOLES HAVE TO BE MADE IN ORDER TO FIT THE CONTACTS TO DOOR LEAVES OR WINDOW SASHES, WHICH FACILITATES THE MOUNTING. DEVICES ARE EQUIPPED WITH ELEMENTS WHICH MASK THE SCREW TERMINALS FOR AN AESTHETIC DESIGN.



Quick and easy installation by the use of screw terminals.




The possibility of adjusting the colour of contacts to surface on which they will be installed.

SURFACE MOUNT MAGNETIC CONTACTS




	AST-MKT2001W/B	AST-MKT2002W/B	AST-MKT2003W/B	AST-MKT2010W/B
Output	NC	NC/NO	NC	NC
Contact specification	0.5 A/100 VDC/10 W/200 mΩ	0.2 A/30 VDC/3 W/200 mΩ	0.5 A/100 VDC/10 W/200 mΩ	0.5 A/100 VDC/10 W/200 mΩ
Connection	screw terminal	screw terminal	screw terminal	cable
Gap distance	20 mm - 25 mm	15 mm - 25 mm	20 mm - 25 mm	20 mm - 25 mm
Applications	windows, wooden doors	windows, wooden doors	windows, wooden doors	windows, wooden doors
Colour	white/brown	white/brown	white/brown	white/brown
Dimensions of contact part (H x W x D)	19 mm x 63.5 mm x 13 mm	12.5 mm x 55 mm x 11.5 mm	19 mm x 63.5 mm x 13 mm	14 mm x 34 mm x 7.5 mm
Dimensions of magnet part (H x W x D)	12 mm x 63.5 mm x 12,8 mm	12.5 mm x 55 mm x 11.5 mm	12 mm x 63.5 mm x 12 mm	14 mm x 34 mm x 7.5 mm

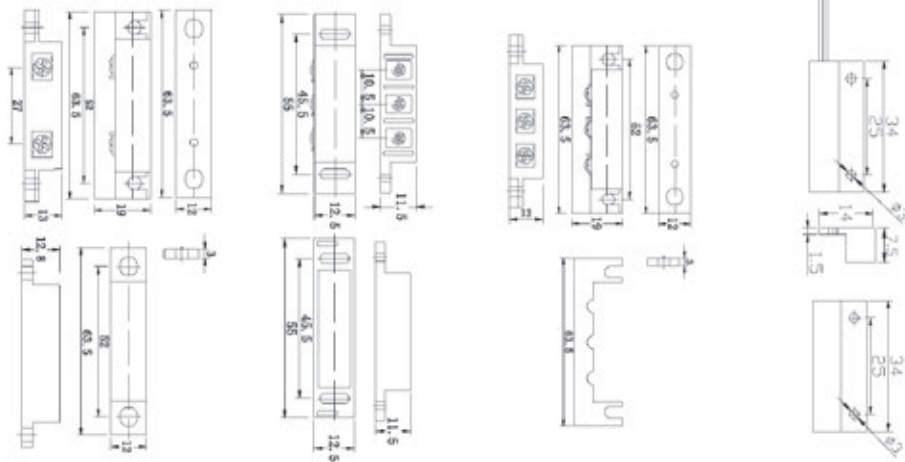



AST-MKT2011W/B	AST-MKT2012W/B	AST-MKT2013W/B	AST-MKT2014W/B	AST-MKT2015	AST-MKT2016	AST-MKT2017	AST-MKT2020	AST-MKT2021	AST-MKT2022W/B
NC	NC	NC	NC	NC	NC	NC	NC	NC	NC
0.5 A/100 VDC/10 W/200 mΩ	0.5 A/100 VDC/10 W/200 mΩ	0.5 A/100 VDC/10 W/200 mΩ	0.5 A/100 VDC/10 W/200 mΩ	0.5 A/100 VDC/10 W/200 mΩ	0.5 A/100 VDC/10 W/200 mΩ	0.5 A/100 VDC/10 W/200 mΩ	0.5 A/100 VDC/10 W/200 mΩ	0.5 A/100 VDC/10 W/200 mΩ	0.5 A/100 VDC/10 W/200 mΩ
cable	cable	cable	screw terminal	cable	cable	cable (metal shield)	cable	cable	cable
20 mm - 25 mm	15 mm - 25 mm	15 mm - 25 mm	20 mm - 25 mm	20 mm - 25 mm	20 mm - 30 mm	30 mm - 40 mm	30 mm - 40 mm	50 mm - 60 mm	40 mm - 50 mm
windows, wooden doors	windows, wooden doors	windows, wooden doors	windows, wooden doors	windows, wooden doors	windows, metal doors	windows, metal doors	metal doors	windows, metal doors	windows, metal doors
white/brown	white/brown	white/brown	white/brown	white	steel	steel	steel	steel	white/brown
13.5 mm x 33.5 mm x 7.5 mm	14 mm x 27 mm x 8 mm	9.5 mm x 50 mm x 7 mm	14 mm x 50 mm x 12 mm	9.8 mm x 51 mm x 13 mm	17 mm x 32 mm x 8 mm	20 mm x 49 mm x 9.6 mm	24,2 mm x 48 mm x 15 mm	16 mm x 106 mm x 10 mm	16 mm x 106 mm x 10 mm
13.5 mm x 33.5 mm x 7.5 mm	14 mm x 27 mm x 8 mm	9.5 mm x 50 mm x 7 mm	14 mm x 50 mm x 12 mm	9.8 mm x 51 mm x 13 mm	17 mm x 32 mm x 8 mm	20 mm x 49 mm x 9.6 mm	24,2 mm x 48 mm x 15 mm	16 mm x 106 mm x 10 mm	16 mm x 106 mm x 10 mm

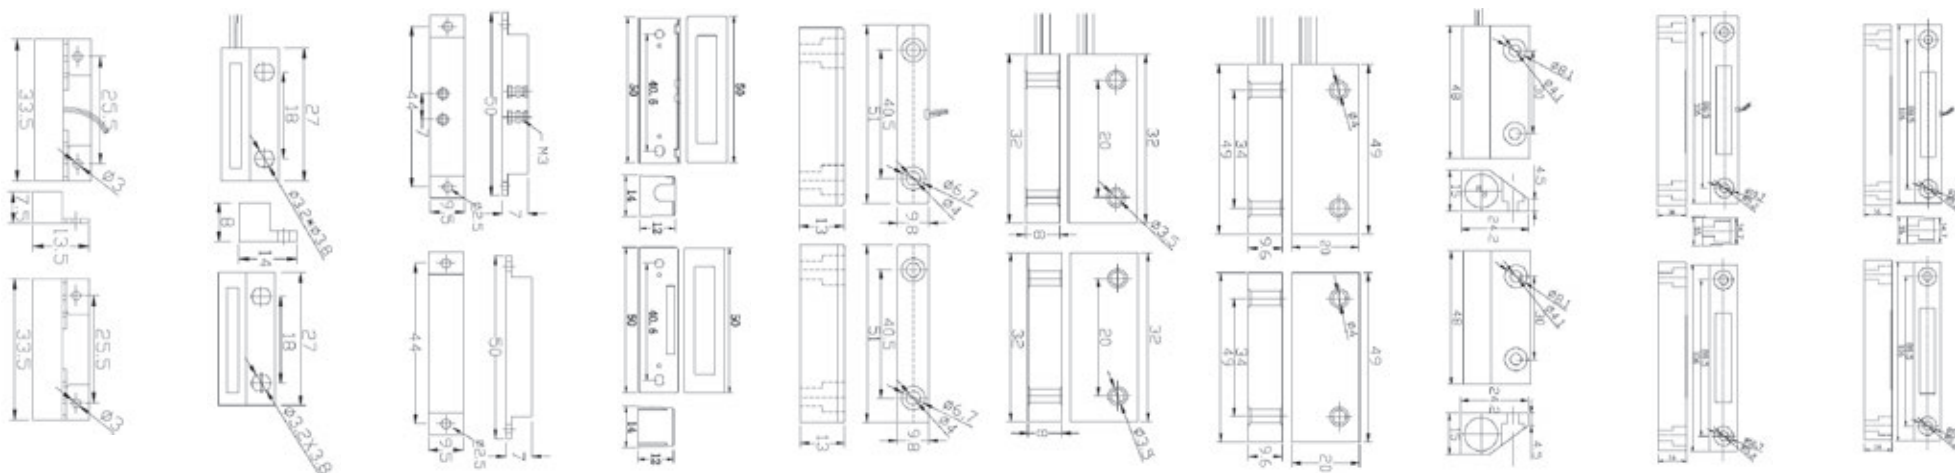

MAGNETIC GATE CONTACTS

OVERHEAD GATE CONTACTS ARE DESIGNED FOR RESIDENTIAL, COMMERCIAL AND INDUSTRIAL APPLICATIONS. THEY ARE HIGHLY DURABLE AND AIRTIGHT. A VERY WIDE SCOPE OF OPERATIONS ENABLES TO USE THESE CONTACTS IN DIFFERENT TYPES OF GATEWAYS. ALL MAGNETIC GATE CONTACTS ARE EQUIPPED WITH A METAL SHIELD THAT PROTECTS THE DEVICE CABLE.

Reinforced, hermetic and metal housing for operation in difficult conditions.

Wires in the metal shield which prevents their damage.



MAGNETIC GATE CONTACTS



AST-MKT2018





AST-MKT2019



AST-MKT2023

Output	NC	NC	NC
Contact specification	0.5 A/100 VDC/10 W/200 mΩ	0.5 A/100 VDC/10 W/200 mΩ	0.5 A/100 VDC/10 W/200 mΩ
Connection	cable (metal shield)	cable (metal shield)	cable (metal shield)
Gap distance	50 mm - 70 mm	50 mm - 70 mm	50 mm - 70 mm
Applications	garage doors	garage doors	garage doors
Colour	steel	steel	steel
Dimensions of contact part (H x W x D)	38 mm x 106 mm x 10 mm	38 mm x 106 mm x 10 mm	47 mm x 105.5 mm x 9.5 mm
Dimensions of magnet part (H x W x D)	16 mm x 106 mm x 16 mm	16 mm x 106 mm x 16 mm	20 mm x 87.5 mm x 19.5 mm

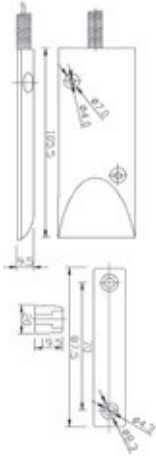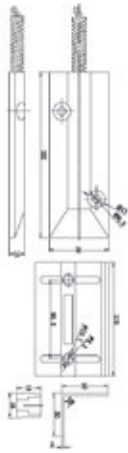



AST-MKT2024

AST-MKT2025

NC

NC

0.5 A/100 VDC/10 W/200 mΩ

0.5 A/100 VDC/10 W/200 mΩ

cable (metal shield)

cable (metal shield)

50 mm - 70 mm

50 mm - 70 mm

garage doors

garage doors

steel



steel

38 mm x 100 mm x 9.5 mm

50 mm x 104 mm x 9.5 mm

50 mm x 105 mm x 50 mm

19.8 mm x 107 mm x 17 mm

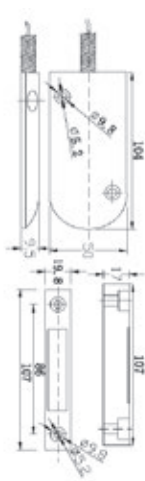

Distribution:



AAT HOLDING S.A.

ul. Puławska 431, 02-801 Warszawa,
Polska (Poland)

e-mail: info@novuscctv.com